


MC Super Water Saver Sprinkler System

Sprinkler Heads

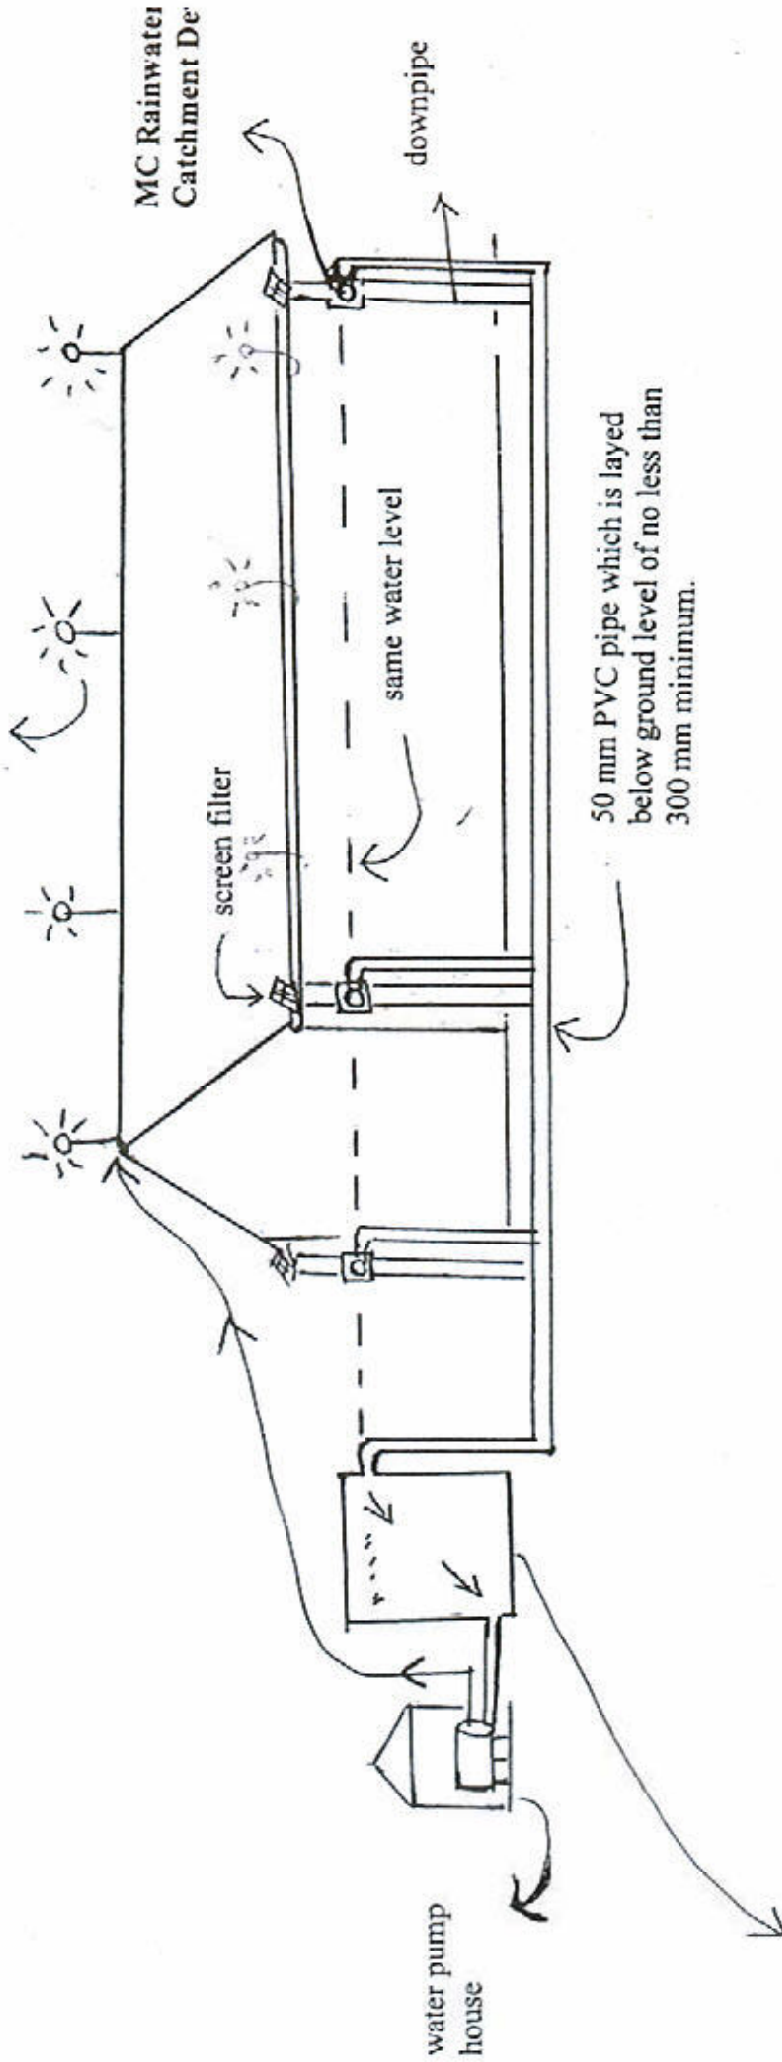

1000/2000 litres water tank

Water is not wasted, the Rainwater Catchment Device collects the water from the roof and diverts it back to the water tank.

This continual recycling process enables the same water to be used over and over again, for the cost of \$1 - \$2.

Note: when using the sprinkler system, loss of water may occur as a result of windy conditions.

Subsequent topping up of the water tank may be required in order to maintain the constant water levels for running the external sprinkler system.

With the Rainwater Catchment Device, there is no longer a need for a 22000 L capacity water tank or dam in order to run the external sprinkler system.

During periods of rain, the Rainwater Catchment Device is also able to collect the rainwater and divert it to the rainwater tank or additional water holding areas.

50 mm PVC pipe which is layed below ground level of no less than 300 mm minimum.